

Caution:


Working under insufficient power supply condition will damage the Nextion model easily.



Blurred screen? Flashing? You may be suffering from power shortages. Power off at the first possible moment. No more repeated attempts to damage your Nextion model.

A small connector is included in the package. Please try to power Nextion with your phone charger through the connector to check if Nextion works well.

A high quality usb cable is required.

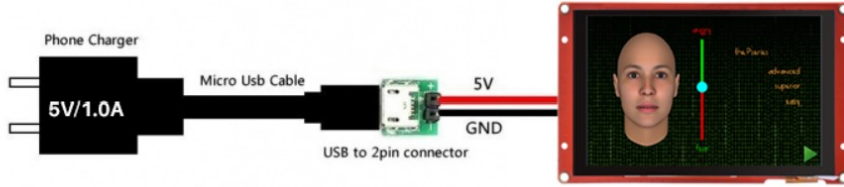

Nextion Models

Nextion Type	Intelligent Series
Nextion Models	NX8048P050-011C (5.0 inch capacitive touchscreen without enclosure)

Specifications

	Data	Description
Color	65K 65536 colors	16 bit 565, 5R-6G-5B
Layout size	136.9mm(L)×84mm(W)×6.2mm(H)	NX8048P050-011C
Active Area (A.A.)	120.7mm(L)×75.8mm(W)	
Visual Area (V.A.)	108.00mm(L)×64.80mm(W)	
Resolution	800×480 pixel	Also can be set as 800×480
Touch type	Capacitive	
Touches	> 1 million	
Backlight	LED	
Backlight lifetime (Average)	>30,000 Hours	
Brightness	300nit	0% to 100%, the interval of adjustment is 1%
Weight	143g	

Electronic Characteristics

	Test Conditions	Min	Typical	Max	Unit
Operating Voltage		4.65	5	6.5	V
Operating Current	VCC=+5V, Brightness is 100%	–	220	–	mA
	SLEEP Mode	–	170	–	mA

Power supply recommend: **5V, 1.0A, DC**

Working Environment & Reliability Parameter

	Test Conditions	Min	Typical	Max	Unit
Working Temperature	5V, Humidity 60%	-20	25	70	°C
Storage Temperature		-30	25	85	°C
Working Humidity	25°C	10%	60%	90%	RH

Interfaces Performance

	Test Conditions	Min	Typical	Max	Unit
Serial Port Baudrate	Standard	2400	9600	921600	bps
Output High Voltage (TXD)	IOH=1mA	3.0	5.0	V _{in}	V
Output Low Voltage(TXD)	IOL=-1mA		0.1	0.2	V
Input High Voltage(RXD)		3.0	5.0	V _{in}	V
Input Low Voltage(RXD)		-0.7	0.0	1.3	V
Serial Port Mode	3.3V/5.0V TTL				
Serial Port	4Pin_2.54mm				
USB interface	NO				
SD card socket	Yes (FAT32 format), support maximum 32G Micro SD Card * microSD card socket is exclusively used to upgrade Nextion firmware /HMI design				
Extended IO	8 Digital extended GPIO				
	IO0-IO7 support input, output and component binding event				
	IO6-IO7 support PWM				
RTC	built-in RTC support (Battery type: CR1220)				

V_{in}: the input voltage of power supply

Memory Features

Memory Type	Test Conditions	Min	Typical	Max	Unit
FLASH Memory	Store fonts and images			120	MB
User Storage	EEPROM			1024	BYTE
RAM Memory	Store variables			512	KB
Instruction Buffer	Instruction Buffer			4096	BYTE

Audio Features

Speaker	Parameter	Min	Typical	Max	Unit
Power	-	0.5	-	1.5	W
Audio Connector Type: 1.25T-2-2A (1.25mm pitch 2-pin housing)					